


## DrayTek 2820 instellen als ADSL-modem voor CallVoip ADSL

Gefeliciteerd met de aanschaf van CallVoip ADSL en de DrayTek 2820.  
Hieronder vindt u een instructie bij het aansluiten van de DrayTek op uw ADSL-lijn.

1. Sluit de DrayTek aan op de voedingsadapter.
2. Verbind uw computer met een LAN-kabel (meegeleverd) met de DrayTek via één van de 4 LAN-poorten.
3. Sluit de ADSL-kabel vanaf de splitter cq. wandcontactdoos aan op poort [ADSL] achterop de DrayTek.
4. Start uw internetbrowser en ga naar adres: <http://192.168.1.1/>.  
U kunt inloggen zonder wachtwoord.
5. Kies in het menu aan de linkerzijde vervolgens menu [WAN] > [Internet Access] > [WAN 1]
6. Kies het rechter tabblad [MPoA (RFC1483)] > zie schermprint hieronder.
7. Selecteer linksbovenin [enable].
8. Bij Encapsulation [1483 Bridged IP LLC].
9. Kies bij VPI en VCI: 0 resp. 35
10. Klik op [OK] om de instellingen op te slaan.
11. De router wordt geherstart. Controleer of u internetverbinding heeft.
12. Indien dat niet het geval is:
  - zet de DrayTek uit, wacht ca. 20 seconden en zet de router dan weer aan.
  - gebruikt u een splitter? Probeer dan of er zonder splitter wel verbinding is

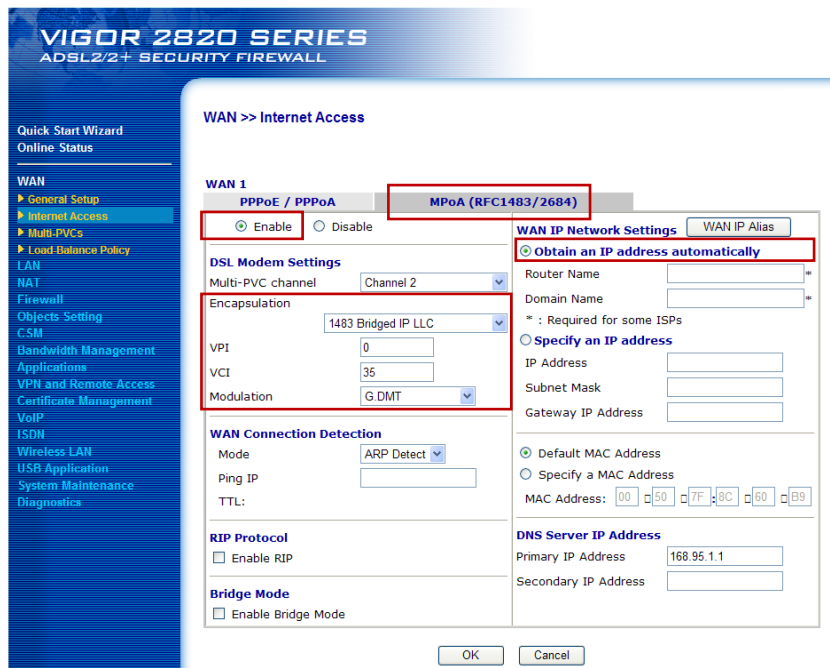

**VIGOR 2820 SERIES**  
ADSL2/2+ SECURITY FIREWALL

Quick Start Wizard  
Online Status

WAN  
 ▶ General Setup  
 ▶ Internet Access  
 ▶ Multi-PVCs  
 ▶ Load-Balance Policy

LAN  
 NAT  
 Firewall  
 Objects Setting  
 CSM  
 Bandwidth Management  
 Applications  
 VPN and Remote Access  
 Certificate Management  
 VoIP  
 ISDN  
 Wireless LAN  
 USB Application  
 System Maintenance  
 Diagnostics

WAN >> Internet Access

WAN 1

PPPoE / PPPoA    **MPoA (RFC1483/2684)**

Enable     Disable

**DSL Modem Settings**

Multi-PVC channel    Channel 2

Encapsulation    1483 Bridged IP LLC

VPI    0

VCI    35

Modulation    G.DMT

**WAN IP Network Settings**    WAN IP Alias

Obtain an IP address automatically

Router Name    \*

Domain Name    \*

\* : Required for some ISPs

Specify an IP address

IP Address    \*

Subnet Mask    \*

Gateway IP Address    \*

Default MAC Address

Specify a MAC Address

MAC Address: 00 50 7F 8C 60 B9

**DNS Server IP Address**

Primary IP Address    168.95.1.1

Secondary IP Address    \*

**WAN Connection Detection**

Mode    ARP Detect

Ping IP    \*

TTL:    \*

**RIP Protocol**

Enable RIP

**Bridge Mode**

Enable Bridge Mode

OK    Cancel

Blijft u problemen ondervinden, neem dan contact op met CallVoip: 050-526 49 33.