

Koldingweg 19-1
9723 HL Groningen

Postbus 5236
9700 GE Groningen

T (050) 820 00 00
F (050) 820 00 08
E callvoip@callvoip.nl
W www.callvoiptelefonie.nl

Schermprints:

Callvoip Business ADSL instellen op FRITZ!Box


v151213MT

Gefeliciteerd met uw Callvoip Business ADSL internetverbinding!

Deze handleiding helpt u bij het instellen van Callvoip Business ADSL op een FRITZ!Box. De handleiding is geschikt voor de meeste soorten FRITZ!Box.

Sluit de FRITZ!Box aan. In de doos van de FRITZ!Box vindt u een Y-kabel (= kabel met 3 uiteinden, de uiteinden zijn gemarkeerd met stickers).

- Sluit het uiteinde met de sticker FRITZ!Box DSL/TEL aan op de DSL/TEL-poort van de FRITZ!Box.
- Sluit u het uiteinde met de sticker SPLITTER DSL aan op de modem-poort van uw ADSL-splitter
- Sluit u het uiteinde TELEFONANSCHLUSS aan op de telefoon-poort van uw ADSL-splitter

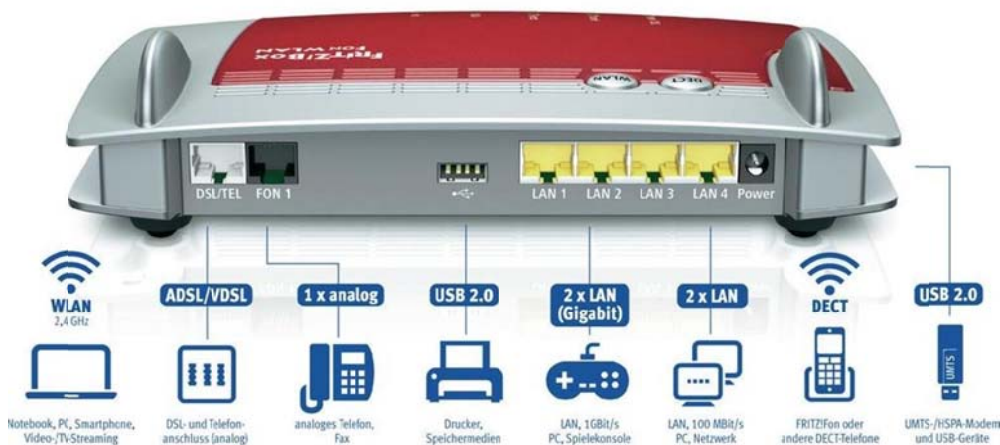

Sluit uw computer aan op de FRITZ!Box en zorg dat u geen WiFi internetverbinding op uw computer actief heeft. Start internet en ga naar <http://192.168.178.1> en log in op de FRITZ!Box.

Kies links in het menu [Internet] → [Account Information].

Vul deze pagina in conform de schermprents op pagina 2.

ING BANK 5041280
IBAN NL66INGB0005041280
BIC INGBNL2A
KVK 02066541
BTW NL1041.63.252.B01

FRITZ! **FRITZ!Box 7390**

FRITZ!Box | FRITZ!NAS | MyFRITZ! | ?

Overview
Internet
Online Monitor
Account Information
Permit Access
Telephony
Home Network
WLAN
DECT
System

Wizards
Configuration, Updates, ...

FRITZ!NAS
Data, Images, Music, Videos

MyFRITZ!
NAS, Calls, Messages

Account Information
Internet Connection | DNS Server

On this page you enter the data of your Internet connection, and can adjust the connection to special circumstances if needed.

Internet Service Provider
Select your Internet service provider:
Internet Service Provider: Other Internet service provider
Name: Callvoip ADSL

Line
Specify how the Internet connection should be established.
 Connecting to a DSL Line
FRITZ!Box is connected to your DSL line using the DSL cable. The DSL modem integrated in the FRITZ!Box is used for the Internet connection.
 Connecting to a Cable Modem (Cable Connection)
Select this kind of connection if the "LAN 1" port of the FRITZ!Box is connected to a cable modem that establishes the Internet connection.
 External Modem or Router
Select this kind of connection if the "LAN 1" port of the FRITZ!Box is connected to an already existing external modem or router.

Account Information
Is account information required?
 Yes
Enter the Internet account information you received from your Internet service provider:
User name: callvoip
Password: callvoip
 No

Connection Settings
The connection settings are already set to the values used most often. You can change these values if needed.
Change connection settings +

Internet Connection
 Maintain permanently (recommended for flat rates)
 Delay disconnection by provider to the period between 5 - 6
 Clear idle connection (recommended for time- or usage-based rates)
Clear automatically after 300 seconds

VLAN Settings
Please note that a VLAN ID is required only in special cases. The required ID was supplied by your Internet service provider.
 Use VLAN
VLAN ID

DSL ATM Settings
 Detect automatically
 Set manually
VPI: 0
VCI: 35
Encapsulation:
 PPPoE
 PPPoA / LLC
 PPPoA / VC-MUX

Check the Internet connection after "Apply" has been clicked

Apply | Cancel | Help

Klik op [apply] om de instellingen op te slaan.

Wacht nu ca 5 minuten en kijk of u internetverbinding heeft.

Zo niet, check de bekabeling en doe de FRITZ!Box dan eens uit, wacht ca 10 sec en doe hem dan weer aan. Komt de verbinding niet op, neem dan contact op met Callvoip voor verdere assistentie.

Ga vervolgens naar menu [Internet] → [DSL Information].

Hier ziet u uw FRITZ!Box (links) en de wijkcentrale (rechts).

Controleer of u een groene lijn ziet tussen FRITZ!Box en wijkcentrale.

Een groene lijn betekent dat u internetverbinding heeft.

Boven de lijn ziet u uw ADSL-snelheid staan.

The screenshot displays the FRITZ!Box 7360 web interface. At the top, the FRITZ! logo and 'FRITZ!Box 7360' are visible. The interface includes a navigation menu on the left with categories like Overview, Internet, Telephony, Home Network, WLAN, DECT, and System. The main content area is titled 'DSL Information' and contains a diagram showing the connection between the FRITZ!Box and the DSL Exchange. The diagram shows a green line connecting the two devices, with data rates of 17020 kbit/s and 1020 kbit/s. Below the diagram, technical details are listed: DSL version 1.100.0.28, DSL enabled [10:45:07] ADSL 2+ (ITU G.992.5) Annex A, and Broadcom 16385 - H0 0. There are 'Refresh' and 'Help' buttons at the bottom right of the DSL Information section.

Deze technote wordt u aangeboden door:

CallvoipTelefonie.nl ^{TO}

CallvoipTelefonie
Koldingweg 19-1
9723 HL GRONINGEN

T: 050-820 00 00
F: 050-820 00 08
callvoip@callvoip.nl